

PLEAT+PLUS® WHEELABRATOR TOP-LOAD FILTERS

6.45" Diameter
1.10" Pleat Height

FEATURES

- DSS design prohibits tube leaks
- All metal design for broader applications.
- Adhesive & mechanical construction.
- Integrated internal pleat retainers.
- Positive sonic welded seaming.
- Wide and shallow pleat design.
- Non-woven, spun bond media.
- Operating temperatures up to 425°F.
- Custom designs for your particular application.

BENEFITS

- Higher throughput capacity.
- Longer life by a factor of two or more.
- Higher operating efficiencies to 99.99%.
- Lower element operating pressure drop.
- Elimination of inlet abrasion problems.
- Reduced downtime and maintenance cost.
- Optimized collector due to higher CFM throughput.
- Reduced product retention due to surface filtration.
- Prolonged filter life due to washable filter designs.



Call for a Quote
205-621-2684



Complete assortment of high temperature fabrics.

MEDIA OPTIONS

SB	Fine denier, spun bond polyester media.
SB-HO	Hydro & oliophobic finish repels water and oil.
SB-ME	Static-dissipating surface with membrane.
SB-TX	Membrane finish for great efficiency & dust release.
CB-TX	Static-dissipating surface with membrane.




199 Corporate Woods Dr
Alabasdter, AL 35007
filta_tec@bellsouth.net www.filta-tec.com
Office 205-621-2684 Cell 205-212-8269 Fax 205-621-2686

PLEAT+PLUS® WHEELABRATOR TOP LOAD FILTERS

6.45" Diameter
1.10" Pleat Height

Overall Length	Media Area 30 Pleats•	Media Area 35 Pleats•	Media Area 40 Pleats*	Media Area 45 Pleats•
20.40"	9.17 ft ²	10.69 ft ²	12.22 ft ²	13.75 ft ²
26.40"	11.92 ft ²	13.90 ft ²	15.89 ft ²	17.88 ft ²
40.40"	18.33 ft ²	21.39 ft ²	24.44 ft ²	27.50 ft ²
54.40"	24.75 ft ²	28.88 ft ²	33.00 ft ²	37.13 ft ²
80.40"	36.67 ft ²	42.78 ft ²	48.89 ft ²	55.00 ft ²

* Custom lengths and pleat counts available upon request.

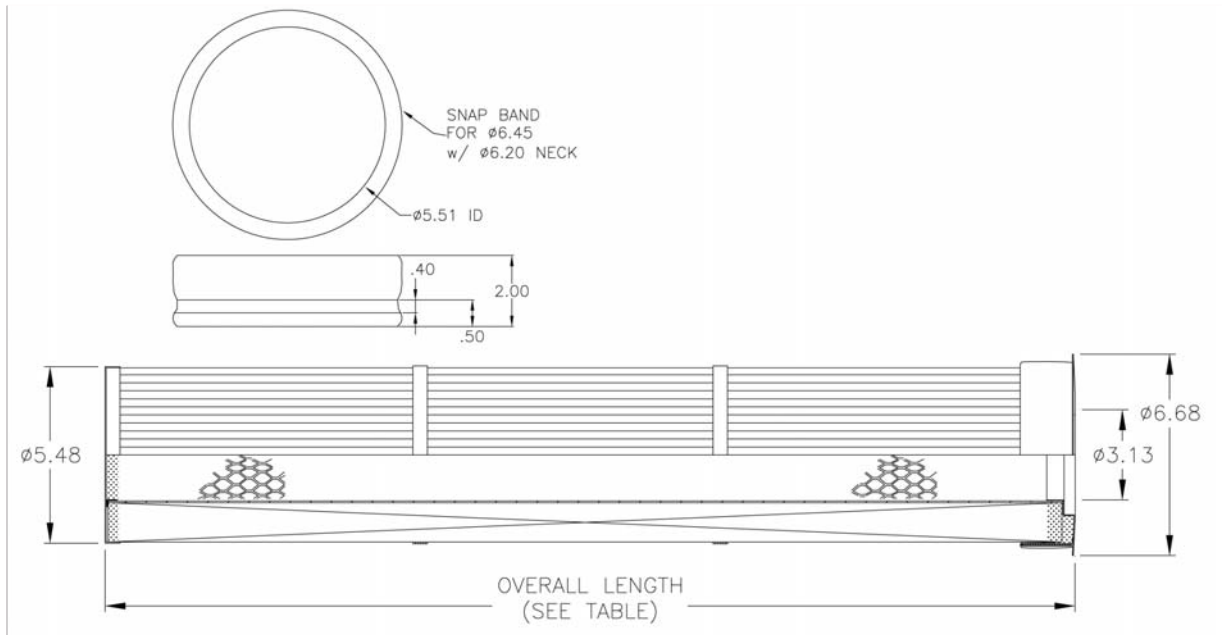

199 Corporate Woods Dr
Alabasdter, AL 35007
filita_tec@bellsouth.net www.filita-tec.com
Office 205-621-2684 Cell 205-212-8269 Fax 205-621-2686