

PLEAT+PLUS® BOTTOM-LOAD FILTERS - SEAL-TITE II®

5.182" Diameter
0.50" Pleat Height

FEATURES

- Perfect retrofit for Fuller, Torit ® TJ/PJ, European & Mikropul
- Patented Super Bead™ sealing design for virtually leak-proof seal.
- Patented intrical retainer clamp for no-miss installations.
- Adhesive & mechanical construction.
- Positive sonic welded seaming.
- Operating temperatures up to 425°F.
- Wide-spaced and shallow pleat design.
- Custom designs for your particular application.



BENEFITS

- Easiest bottom load filter installation available on the market today!
- High throughput capacity.
- Higher operating capacities to 99.99%.
- Longer life by a factor of two or more.
- Lower element operating pressure drop.
- Elimination of inlet abrasion problems associated with bags.
- Reduced downtime and maintenance cost.
- Optimized collector due to higher CFM throughput.
- Reduced product retention due to surface filtration.
- Prolonged filter life due to washable filter designs.

Call for a Quote
205-621-2684



MEDIA OPTIONS

Complete assortment of high temperature fabrics.

SB	Fine denier, spun bond polyester media.
SB-HO	Hydro & oliophobic finish repels water and oil.
SB-ME	Static-dissipating surface with membrane.
SB-TX	Membrane finish for great efficiency & dust release.
CB-TX	Static-dissipating surface with membrane.




199 Corporate Woods Dr
Alabaster, AL 35007
filtatec@bellsouth.net www.filtatec.com
Office 205-621-2684 Cell 205-212-8269 Fax 205-621-2686

PLEAT+PLUS® BOTTOM-LOAD FILTERS - SEAL-TITE II®

5.182" Diameter
0.50" Pleat Height

Overall Length	Media Area 35 Pleats•	Media Area 40 Pleats•	Media Area 45 Pleats*	Media Area 60 Pleats•
22.50	4.9 ft ²	5.6 ft ²	6.3 ft ²	8.3 ft ²
28.50	6.3 ft ²	7.2 ft ²	8.1 ft ²	10.8 ft ²
42.50	9.7 ft ²	11.1 ft ²	12.5 ft ²	16.7 ft ²
56.50	13.1 ft ²	15.0 ft ²	16.9 ft ²	22.5 ft ²
82.50	19.4 ft ²	22.2 ft ²	25.0 ft ²	33.3 ft ²

* Custom lengths and pleat counts available upon request.

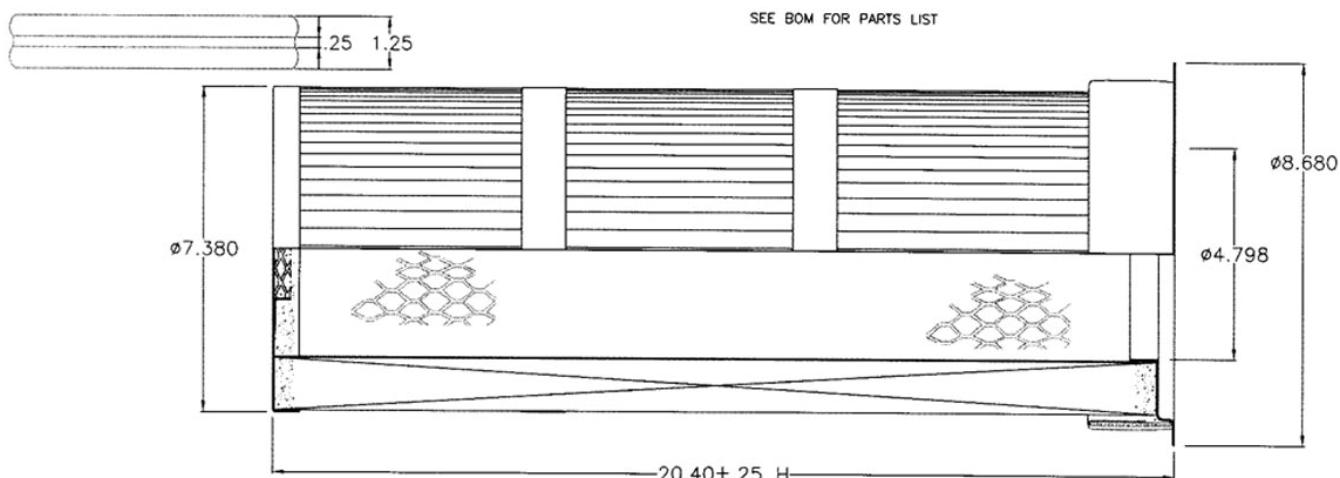

199 Corporate Woods Dr
Alabaster, AL 35007
filta_tec@bellsouth.net www.filta-tec.com
Office 205-621-2684 Cell 205-212-8269 Fax 205-621-2686